


# .222 REMINGTON

Introduced in 1950 by Remington in the Model 722 rifle (and still available in the M700), the “triple deuce” was an “overnight success.” It has a well deserved reputation for accuracy and was for a long time the top contender at benchrest matches.

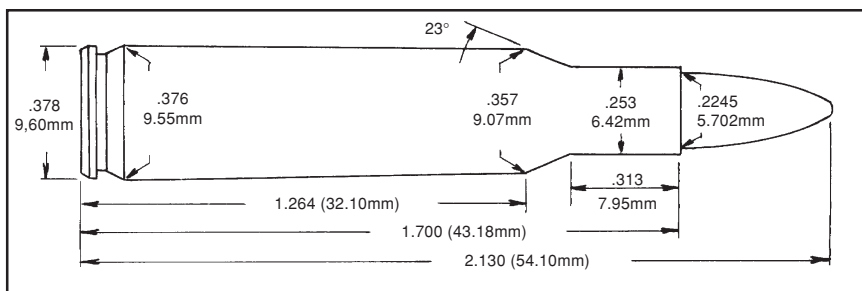

Its relatively mild pressure gives long barrel life while providing varmint hunting capability out to 250 yards.

In the years since its commercial introduction, the .223 Remington has made significant inroads into the .222's popularity. However, the 222's mild report and excellent accuracy continues to attract new shooters.

The SAAMI Maximum Average Pressure for the .222 Remington is 50,000 P.S.I. and 46,000 C.U.P.

<b>.222 REMINGTON</b>				
Gun	DOUGLAS	Max Length	1.700"	
Barrel Length	24"	Trim Length	1.680"	
Primer	REM 7°	OAL Max	2.130"	
Case	REM/WW	OAL Min	2.040"	

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
44(L) RNGC	<b>5744</b>	--	--	<b>5744</b>	12.0	2161	21,700*	1.930"	LY 225438
NOS 40 BT	<b>1680</b>	19.8	3168	<b>1680</b>	22.0	3601	49,400	2.140"	
	<b>2015</b>	21.6	3124	<b>2015</b>	24.0	3550	48,000		Compressed
	<b>2230</b>	24.3	3251	<b>2230</b>	27.0	3695	47,100		Compressed
	<b>2460</b>	24.3	3149	<b>2460</b>	27.0	3579	46,400		Compressed
	<b>2495</b>	21.6	2874	<b>2495</b>	24.0	3266	37,400		Compressed
NOS 45 SB	<b>5744</b>	15.7	2555	<b>5744</b>	17.5	2904	44,000*	2.065"	
	<b>1680</b>	18.9	2901	<b>1680</b>	21.0	3297	48,500		
	<b>2015</b>	22.1	2978	<b>2015</b>	24.5	3384	49,300		
	<b>2230</b>	24.3	3033	<b>2230</b>	27.0	3447	47,400		Compressed
	<b>2460</b>	24.3	2996	<b>2460</b>	27.0	3405	45,900		Compressed
	<b>2495</b>	21.6	2776	<b>2495</b>	24.0	3154	39,900		Compressed
	<b>2520</b>	22.5	2777	<b>2520</b>	25.0	3156	34,200	Compressed	

## .222 REMINGTON (continued)

Bullet	START LOADS			MAXIMUM LOADS			P.S.I.	Cartridge Length	Comment
	Powder	Grains	Vel.	Powder	Grains	Vel.			
HDY 50 SX ***	<b>1680</b>	16.6	2648	<b>1680</b>	18.5	3009	50,000	2.150"	**
	<b>2015</b>	21.2	2823	<b>2015</b>	23.5	3208	45,800		
	<b>2230</b>	22.1	2840	<b>2230</b>	24.5	3227	48,200		Compressed
	<b>2460</b>	22.1	2820	<b>2460</b>	24.5	3204	46,000		Compressed
	<b>2495</b>	21.6	2678	<b>2495</b>	24.0	3043	41,100		Compressed
	<b>2520</b>	22.5	2711	<b>2520</b>	25.0	3081	38,300		Compressed
SPR 50	<b>5744</b>	15.3	2457	<b>5744</b>	17.0	2792	44,700*	2.065"	
HDY 53 HP Match	<b>1680</b>	17.1	2590	<b>1680</b>	19.0	2943	47,400	2.190"	**
	<b>2015</b>	21.1	2811	<b>2015</b>	23.5	3194	50,000		
	<b>2230</b>	22.1	2746	<b>2230</b>	24.5	3120	46,400		Compressed
	<b>2460</b>	22.1	2738	<b>2460</b>	24.5	3111	45,500		Compressed
	<b>2495</b>	21.6	2702	<b>2495</b>	24.0	3071	46,300		Compressed
	<b>2520</b>	22.5	2712	<b>2520</b>	25.0	3082	40,900		Compressed
NOS 55 SB ***	<b>1680</b>	17.1	2548	<b>1680</b>	19.0	2896	44,200	2.155"	**
	<b>2015</b>	20.3	2681	<b>2015</b>	22.5	3047	46,100		
	<b>2230</b>	22.1	2733	<b>2230</b>	24.5	3106	46,200		
	<b>2460</b>	22.1	2720	<b>2460</b>	24.5	3091	45,000		
	<b>2495</b>	21.2	2570	<b>2495</b>	23.5	2920	42,100		Compressed
	<b>2520</b>	22.1	2607	<b>2520</b>	24.5	2962	36,300		Compressed
NOS 55 BT	<b>5744</b>	15.1	2360	<b>5744</b>	16.8	2682	45,900*	2.200"	
HDY 60 SP	<b>1680</b>	17.1	2467	<b>1680</b>	19.0	2803	50,000	2.200"	**
	<b>2015</b>	20.0	2588	<b>2015</b>	22.2	2941	47,800		
	<b>2230</b>	21.6	2592	<b>2230</b>	24.0	2945	48,100		
	<b>2460</b>	21.5	2586	<b>2460</b>	23.9	2939	46,100		
	<b>2495</b>	21.2	2582	<b>2495</b>	23.5	2934	49,400		Compressed
	<b>2520</b>	22.1	2583	<b>2520</b>	24.5	2935	43,900		Compressed

\* Pressure data in C.U.P.

\*\* Over SAAMI Maximum OAL

\*\*\* WW Cases